## NASA Goddard Space Flight Center NASA Goddard Space Flight Center Code 690, Greenbelt, MD 20771, USA UPDATES TO THE IGS DATA CENTER INFRASTRUCTURE

Michael Schmidt (MSchmidt@nrcan.gc.ca) **ABSTRACT:** The global data centers are key components of the IGS infrastructure, providing access to a full suite of GNSS data, products, and information. These archives are essential tools for a diverse international scientific user community. Since the start of the IGS in 1992, the number of stations, Geological Survey of Canada, Natural Resources Canada types of station data and derived products, re-publishing of previously archived data and products, transmission of historic data, and the resulting re-distribution of





Patrick Michael (Patrick.Michael@nasa.gov) CUA Catholic University of America NASA Goddard Space Flight Center Code 690, Greenbelt, MD 20771, USA Yuan Lu (yuan.lu@nrcan.gc.ca)

Geological Survey of Canada, Natural Resources Canada P.O. Box 6000, Sidney BC, V8L 4B2, CANADA Ressources naturelles

## PROVEMENTS TO IGS GDC ARCHIVE CONTENTS AND PROCEDURES

long term, for data center equalization and validation of data holdings, modernization of compression schemes, and reporting of usage statistics.

ODC2

ODC3

1 station

ODC4

10 stations

## Recommendations for Improvements to IGS Data Dissemination:

The main goal of the IGS Global Data Centers (GDCs) is to ensure reliable, consistent, ready user access to the full suite of GNSS data and products. In order to satisfy this goal, the IGS GDCs need to review and update their procedures for populating and maintaining their archives.

### **Current situation:**

- Individual Station Operators (SOs) and Operational Data Centers (ODCs) provide data to one or more "upper level" Regional Data Centers (RDCs) or Global Data Centers (GDCs)
- RDCs/GDCs currently equalize selected data from selected sites (Note: There is some equalization of data but there is no rigorous mirroring of primary data submissions or subsequent re-submissions)
- Result: Inhomogeneous data set (inconsistent files, bad data, and errors in data) in GDCs

### Proposed solution:

- Data should be pushed directly from source (SO/ODC) to archive centers (RDCs/GDCs)
- Ensures responsibility for data remains with source (SO/ODC)
- Data distributed directly by the SO/ODC to ALL IGS GDCs
- Responsibility remains with the SO/ODC to ensure that data are distributed to a GDC after GDC outage, etc.
- One source for data distribution for each IGS site
- Back up source encouraged where possible, but only one active source at any one time

## Advantages:

- Implies simplified data flow
- Ensures responsibility for data remains with SO/ODC
- Ensures data are distributed/mirrored across all GDCs (primary submission and subsequent re-submissions)
- Ensures global data availability should individual GDCs temporarily go off-line
- Allows for timely notification of data re-submissions

## Recommendations for IGS GDC Data Holdings and Handling Data Resubmissions:

## **Current situation:**

- GDCs provide access to different sets of IGS sites => Users must "shop" multiple GDCs to retrieve required data
- GDCs not synchronized and therefore not necessarily holding most current data => Inhomogeneous data set in GDCs and RDCs

## Proposed solution:

- GDCs archive data from, at a minimum, all sites in IGS network
- GDCs provide on-line resources to summarize data holdings GDCs post data files as received without re-formatting or
- changing data files in any way
- GDCs verify integrity of data holdings by comparing file check sums, flagging any differences and updating archive(s) as required • SO/ODCs distribute updated data files to all GDC's
- SO/ODC issues advisory immediately upon data resubmissions using a prescribed format
- GDCs extract summary info from advisory email to update resubmission file at each data center, one line per message

## Advantages:

Ensures that data are consistent among GDCs

4 number Number of detected slips

Receiver Type 20 char Type of GPS receiver from RINEX header

Antenna Type 20 char Type of GPS antenna from RINEX heade

Ant. Height 6 number Height of antenna from RINEX header

Marker Number 10 char Marker DOMES number from RINEX heade:


Marker Name 20 char Marker name from RINEX header


1 char GPS type

RINEX Version 7 char RINEX Version number Dly (M) 3 number Delivery delay in minutes

number Version of the data file (set to 1 for initial delivery

- Ensures replacement data are distributed to all GDCs
- Ensures users can easily get data from any GDC for any IGS site
- Provides redundant data availability including resubmitted data files

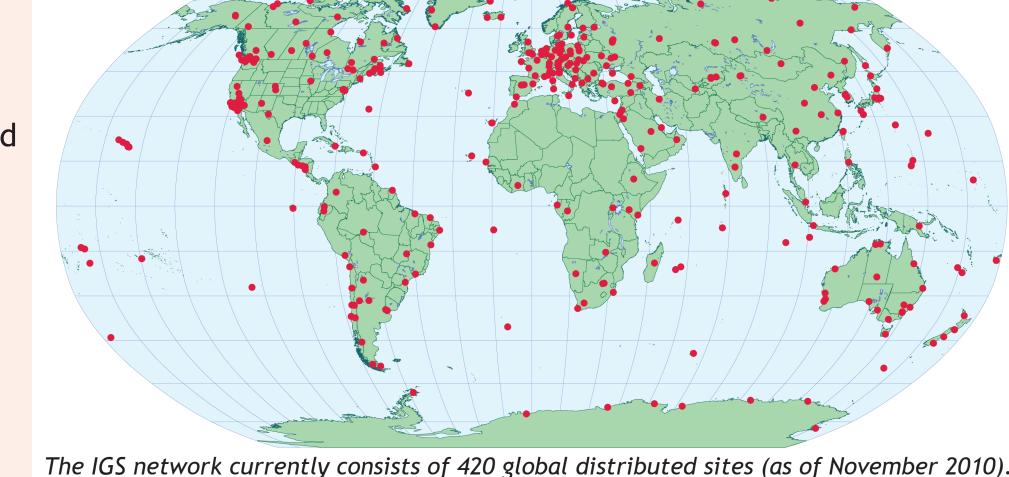

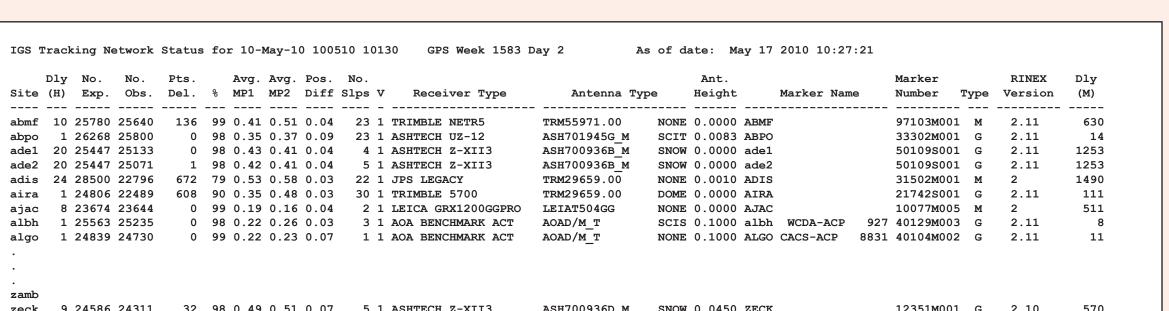

zimm 1 24423 24177 197 98 0.38 0.34 0.07 47 1 TRIMBLE NETRS TRM29659.00 NONE 0.0000 ZIMM zwe2 9 25076 24785 0 98 0.28 0.28 0.07 39 1 SEPT POLARX2 Program: QC 2009Mar23 by UNAVCO run with elevation angle cutoff of 10 degrees Field Size Type 4 char Site name 3 number Delivery delay in hours 5 number Total number of observations expected 5 number Total number of observations in file 5 number Total number of points deleted number Data collection percentage 4 number Average L2 multipath (rounded to two decimal places) 4 number RINEX vs QC point position difference (Km)

ONUMENT N START DATE: 2010-10-30 END DATE: Invalid header records Example of a data replacement email.

An example of a file maintained by the CDDIS for summarizing daily GNSS data holdings. This archive status file of CDDIS GNSS data holdings reflects the timeliness of the data delivered as well as statistics on number of data points, cycle slips, and multipath. The user community can obtain a snapshot of data availability and quality by viewing the contents of such a summary file as shown in the figure. The CDDIS staff has recently enhanced the format of these files as requested by the Infrastructure Committee. Software for generating the files is available to other data centers.

## PDATE TO IGS DATA CENTER COMPRESSION SCHEME

## Recommendations for Updates to IGS Compression Scheme:

## **Current situation:**

- IGS infrastructure (e.g., stations, DCs, ACs, etc.) currently uses a two stage compression scheme for RINEX observation data: Hatanaka compacting followed by UNIX compress (Z)
- Z compress is not as efficient as other compression schemes
- DCs compress once (or twice); users decompress often; therefore, efficient size compression is more important from a DC perspective

### Proposed solution:

- Change compression tool used by the IGS infrastructure to a more effective, commonly available compression tool
- Three options are considered here: gzip, bzip2, and xz
- All are widely distributed across multiple platforms and operating systems

- All proposed compression software provide an improved factor of compression over Z; some require more memory and CPU resources
- All provide checksum capture

these data and products from data center to data center. In addition, statistics on the usage of the IGS data center infrastructure and present ideas, both near-term and

- A DC recompression process will allow DCs to QC their archives, capture checksum information for ensuring intact file transfers (however, a cryptographic checksum is preferred for performing DC content intercomparisons and data rationalization)
- Compression of high-rate files (1Hz and higher) further improves by using one of these new compression tools

### *Implications:*


- A new compression scheme should be implemented across the IGS infrastructure including SOs/ODCs, RDCs, GDCs, ACs, etc.)
- Implementation must be coordinated across the IGS infrastructure as well as with manufacturers, users, etc.; an overlap period will be required

## **Recommendations:**

- Propose new compression scheme and survey IGS infrastructure
- Coordinate changes within IGS but also with general user community, receiver manufacturers, etc.
- Develop timeline for implementation
- Coordinate changes to allow DCs to utilize more efficient compression on historic
- Begin use of new compression scheme as part of overall data center archive content evaluation in preparation for IGS reanalysis 2

## **Analysis of Compression Testing**

Tests of commonly available compression schemes (Z, gzip, bzip2, and xz) were performed or a CDDIS server running the Linux OS; the results are shown in Charts 1-5.

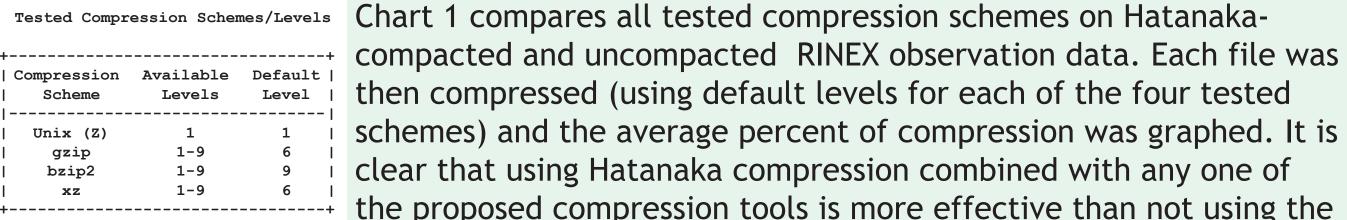

provide better compression than using Hatanaka + another compression tool.

then compressed (using default levels for each of the four tested schemes) and the average percent of compression was graphed. It is clear that using Hatanaka compression combined with any one of the proposed compression tools is more effective than not using the Hatanaka software. In other words, there is no common compression tool available that will


Charts 2-4 summarize tests on one day of daily 30-second GNSS data. A total of 1,586 files were compressed and uncompressed using each compression scheme and available compression level. The selected directory included compact (Hatanaka) and un-compacted RINEX observation, navigation, meteorological data, and teqc summary files. Chart 2 shows the compression factor as a percentage of the original file for each compression scheme at al available levels. The higher the level, the more compressed the resulting file. The larger the bar in this chart the better the compression; as can be seen, xz results in a better


constant on this data set regardless of the compression level. However, a higher level of compression can come at the price of the time required to compress and decompress the files. As shown in Chart 3, xz compression time increases at higher compression levels; bzip2 compression time is relatively constant and gzip increases significantly using higher levels.


compression factor overall. Bzip2 provides improved compression over gzip and is rather


Chart 4 presents the time required for decompression of the files; compression level has little effect on the time required for decompression. Here bzip2 performance is worse than the other two compression schemes. Taken together, Charts 2-4 show that xz level 3, gzip level 6, and bzip2 level 9 provide the best compression in size with reasonable computing time.


Chart 5 summarizes compression for different types of GNSS data, daily 30-second files, hourly 30-second files, and sub-hourly, high-rate 1-second files. The compression levels used for this chart are gzip level 6 (default), bzip2 level 9 (default), and xz level 3. Xz consistently provides the best compression for all types of GNSS data.

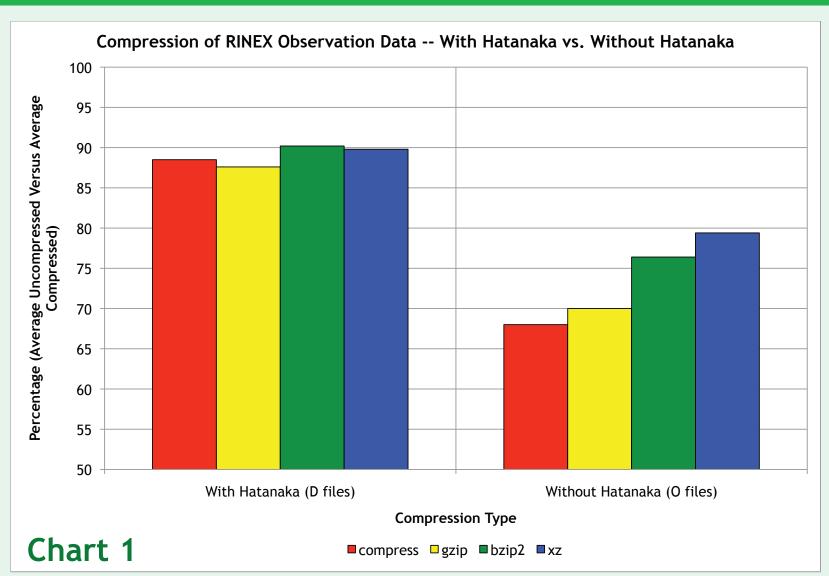

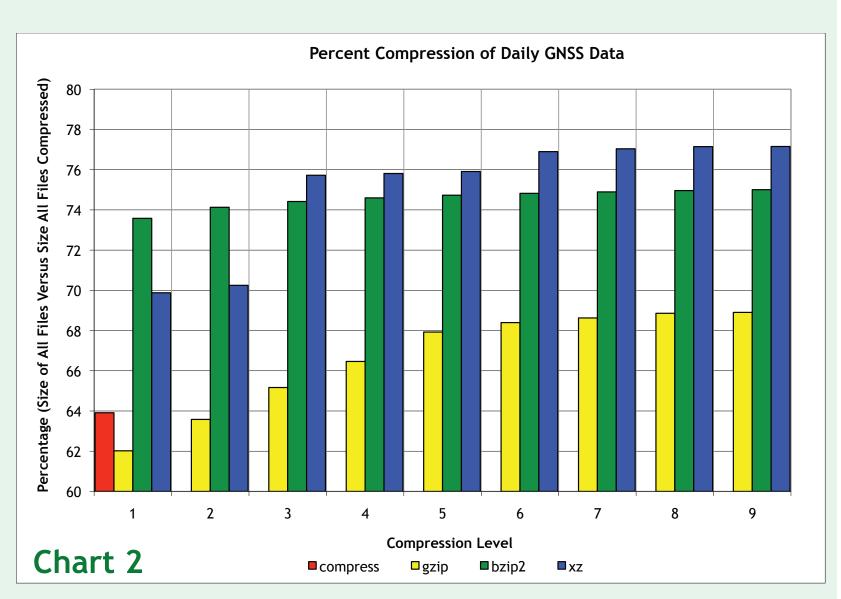

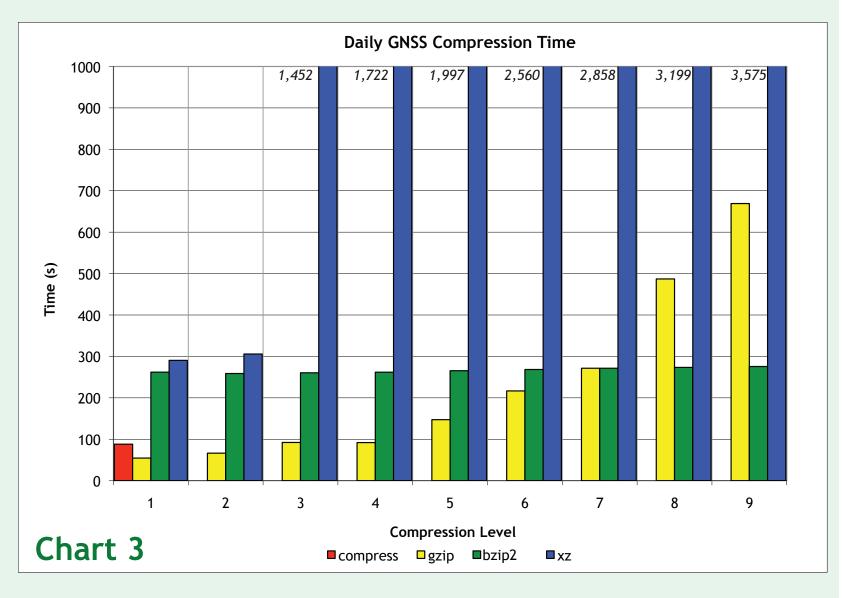

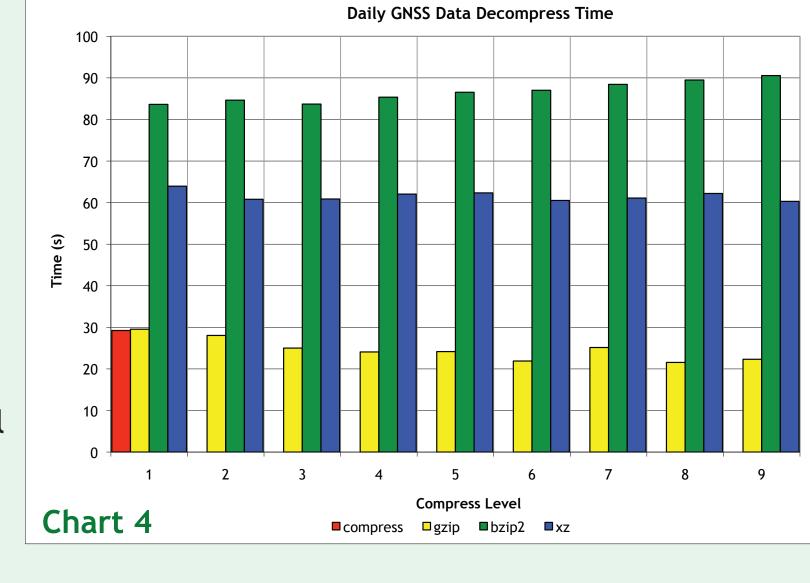

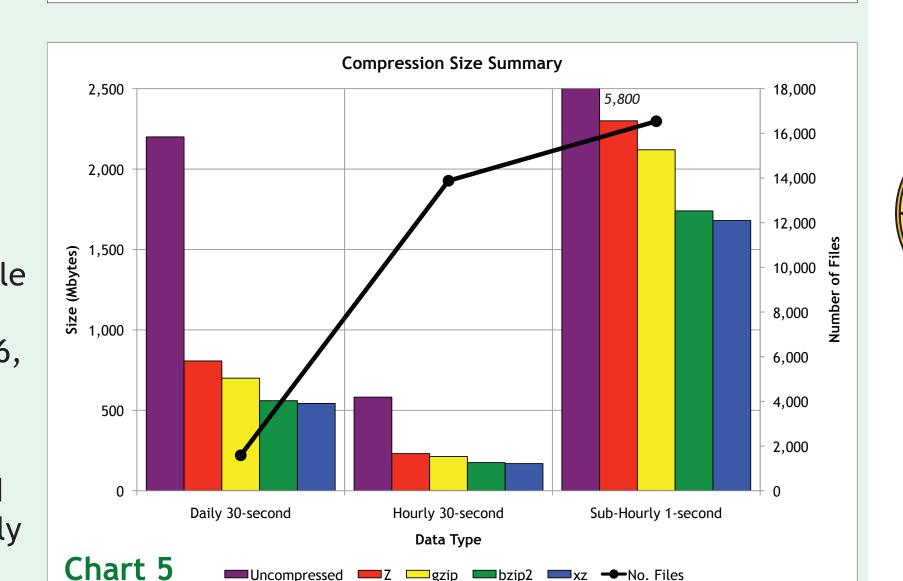

# URING IGS GDC USAGE METRICS

Carey Noll (Carey. Noll@nasa.gov)

Recommendations for Monitoring GDC Archive Usage


## Current situation:


- Many organizations provide data and derived products to IGS data centers
- IGS should periodically evaluate the effectiveness of DC operations and the scope of their content distribution

## Proposed solution:

- Develop process to capture and analyze distribution metrics at IGS GDCs
- Report results by data/product type, amount of data retrieved (number/volume of files), and destination


• Organizations can use metrics to understand the extent of the utilization of their contributions to the IGS

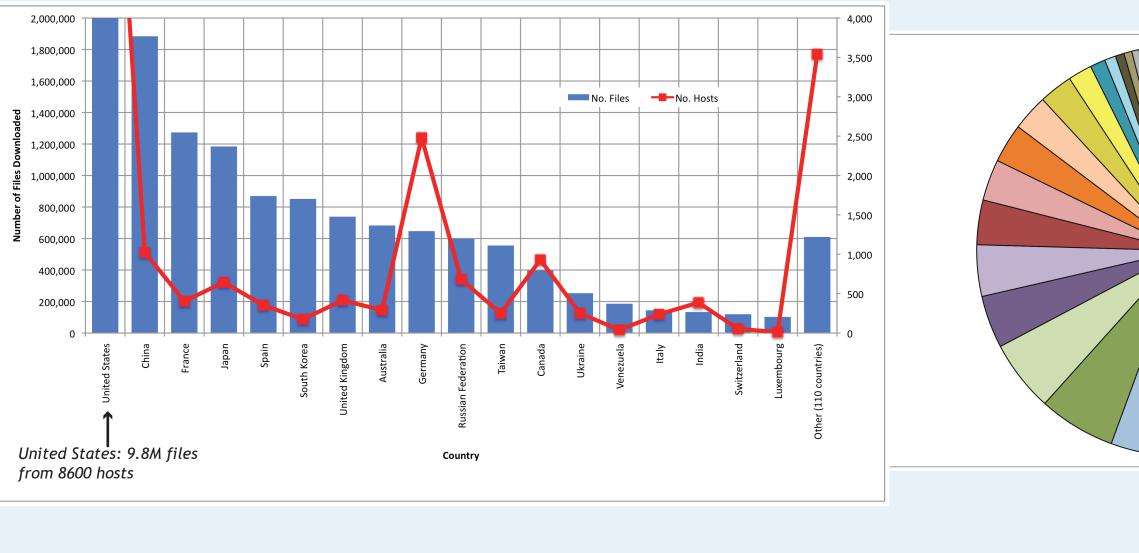


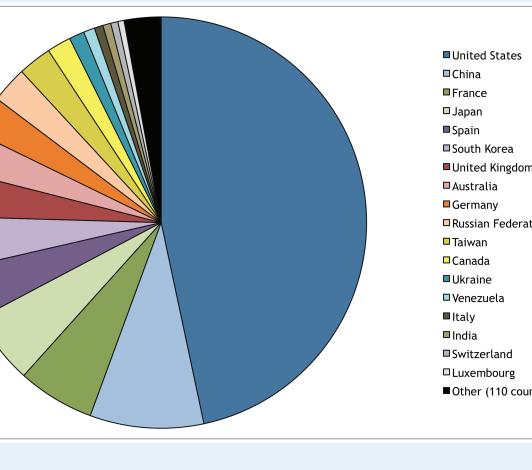


As an example, the CDDIS has loaded the server's ftp distribution logs into a MySQL database. Queries were constructed to determine the number of file downloads based on a particular data or product type. Using freely available IP host information, the location information (i.e., country) of downloaded files can be determined. The first set of charts (above) shows the total number of daily 30-second GNSS files downloaded from June through November 2010, sorted by country. The second set of charts

presents the downloads for the same time period, for 30-second GNSS files from NRCan sites only.

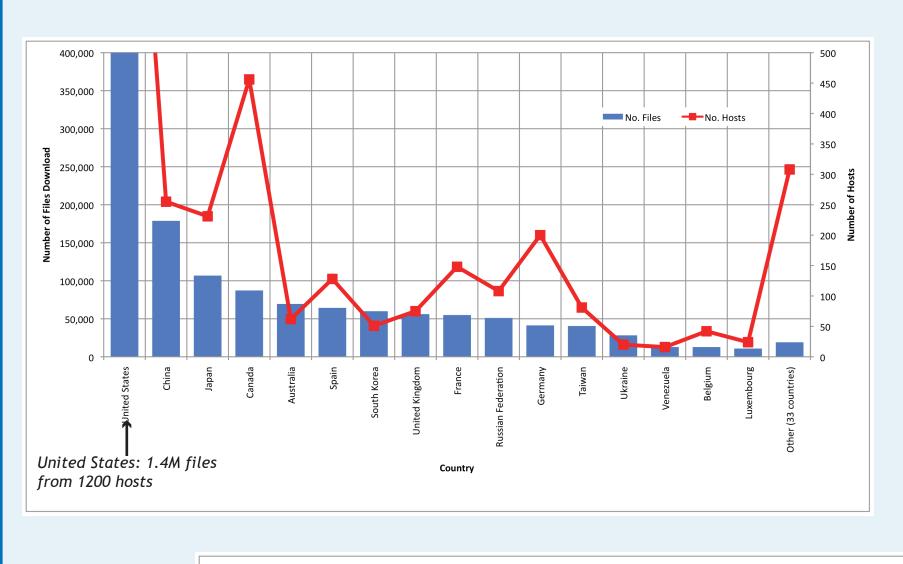

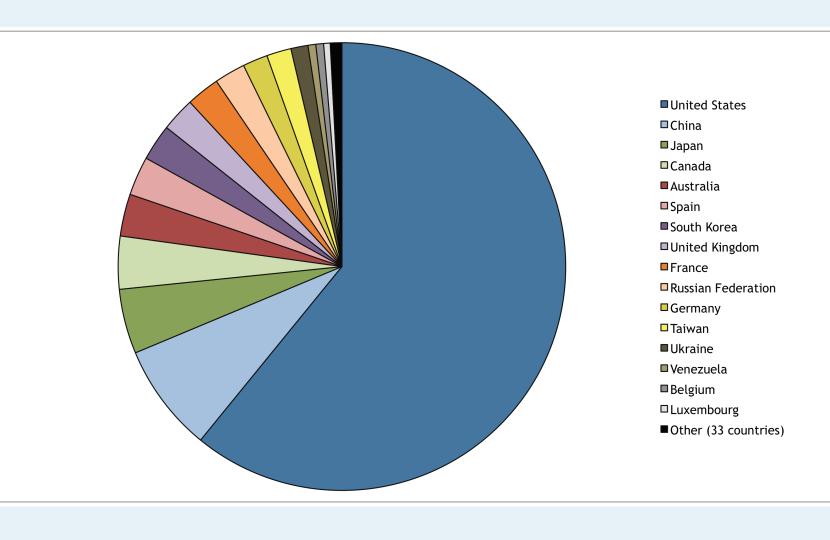

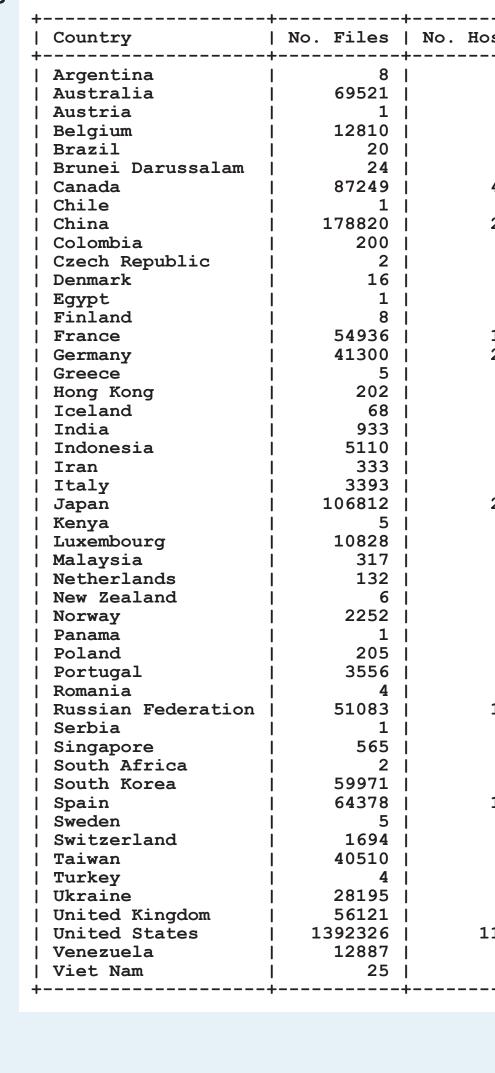

# ONCLUDING REMARKS

This poster has presented ideas for modifying IGS data center operations to improve efficiency and ensure a robust data and product archive infrastructure for the user community. However, any ideas shown here will require further research in order to develop concrete recommendations and schedules on ways forward. Any major modifications to data center operations must be introduced under close coordination with the IGS Infrastructure Committee, the IGS Data Center Working Group (DCWG), the IGS data centers, receiver manufacturers and, of course, with the user community. The authors would like to encourage feedback on the proposals presented here. Please send any comments, suggestions, or questions to Carey Noll (Carey.Noll@nasa.gov).